

10/19/99

**UTILITY  
PATENT APPLICATION  
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

1807.0756

First Named Inventor or Application Identifier

JEAN-JACQUES MOREAU

Express Mail Label No.

JCS25 U.S. PTO

09/22/99



10/19/99

**APPLICATION ELEMENTS**

See MPEP chapter 600 concerning utility patent application contents.

**ADDRESS TO:**Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 202311. ☐ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)2. ☒ Specification Total Pages 3. ☒ Drawing(s) (35 USC 113) Total Sheets 4. ☒ Oath or Declaration Total Pages 

- a. ☐ Newly executed (original or copy)  
b. ☐ Unexecuted for information purposes  
c. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 17 completed)  
**[Note Box 5 below]**

i. ☐ **DELETION OF INVENTOR(S)**  
Signed Statement attached deleting inventor(s)  
named in the prior application, see 37 CFR  
1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (useable if Box 4c is checked)  
The entire disclosure of the prior application, from which a copy of the  
oath or declaration is supplied under Box 4c, is considered as being  
part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)7. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)

- a. ☐ Computer Readable Copy  
b. ☐ Paper Copy (identical to computer copy)  
c. ☐ Statement verifying identity of above copies

**ACCOMPANYING APPLICATION PARTS**

8. ☐ Assignment Papers (cover sheet & document(s))  
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)  
10. ☐ English Translation Document (if applicable)  
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations  
12. ☐ Preliminary Amendment  
13. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)  
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application Status still proper and desired  
15. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)  
16. ☐ Other: \_\_\_\_\_

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_/\_\_\_\_**18. CORRESPONDENCE ADDRESS**☒ Customer Number or Bar Code Label05514  
(Insert Customer No. or Attach bar code label here)or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax

+

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	152 -20=	132	X \$ 18.00 =	\$2,376.00
	INDEPENDENT CLAIMS (37 cfr 1.16(b))	3-3 =	0	X \$ 78.00 =	\$ 0.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$ 260.00
				BASIC FEE (37 CFR 1.16(a))	\$ 760.00
	Total of above Calculations =				\$3,396.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL =				\$3,396.00

## 19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.


20. ☒ A check in the amount of \$ 3,396.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ \_\_\_\_\_ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

**SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED**

NAME	Leonard P. Diana (Reg. No. 29,296)
SIGNATURE	
DATE	October 18, 1999

# **PATENT OF INVENTION**

---

## **APPLICANTS**

**Jean-Jacques MOREAU**

**and**

**Mickaël LORGEUX**

## **TITLE**

**“Method and device for predicting the quantity of printing product available in a printer and necessary for printing a document”**

“Method and device for predicting the quantity of printing product available in a printer and necessary for printing a document”

5

The invention relates to a method of predicting the quantity of one or more printing products necessary for printing a document stored in the form of digital data, for example in a computer, the latter being able to control a printer associated with it directly or indirectly via a network. The invention also  
10 concerns a device for implementing the method.

The invention also applies to a method of managing printing product resources available in a colour printer, for printing a document stored in the form of digital data, for example in a computer, the latter being able to control said printer associated with it directly or indirectly via a network. The invention  
15 also concerns a device for implementing the method.

A printer contains at least one and generally several reservoirs of printing products. Some reservoirs can be integrated into the same cartridge comprising several compartments. For example, an inkjet printer for “black and white” printing contains a single reservoir of black ink. On the other hand, an  
20 inkjet colour printer contains printing products of different colours, notably cyan, magenta and yellow. In addition, a reservoir of black printing product is provided. On certain high-performance printers, use may be made of printing products of different shades of these three colours. It will also be possible to use other colours such as red, blue, green, white, silver and gold. Printing a  
25 document will use all or some of the printing products present in the different reservoirs. Obviously, the quantity of a particular printing product used depends notably on the content of the document to be printed. A simple typed document will require a printing product in a single colour, usually black. On the other hand, an illustrated report may contain images and graphs using  
30 colours. In this case, the printer will consume at least black, blue, magenta and cyan in variable proportions.

The quantity of printing product consumed also depends on the configuration of the printer at the time of printing. Certain printers make it possible to use one printing mode amongst several possible ones, of low, medium or high resolution, in black and white and in colour. Consequently the same printer may consume very different quantities of printing product, for the same document stored in digital form, according to the print mode selected.

The quantity of printing product consumed also depends on the physical characteristics of the printing means. It depends notably, for an inkjet printer, on the type of reservoir or cartridge used, the diameter of the ink ejection nozzles on the print head and the very nature of the printing product, the size of the droplets ejected depending on the pigments used, and therefore the colour.

The quantity of printing product consumed also depends on the characteristics of the paper used. For example a high-weight glossy paper will have to receive a larger quantity of printing product than an ordinary paper.

Finally, it should be noted that the quantity of printing product consumed depends also on the characteristics of the environment: levels of humidity, pressure, temperature, etc. These characteristics are unstable by nature and falsify predictions. All the others can be predetermined or known.

For all these reasons, it is frequent for one reservoir to empty much before the others. If all the reservoirs are independent, wastage of expensive printing products can be avoided, but frequent interventions are necessary. If reservoirs are combined in one and the same cartridge, the exhaustion of one gives rise to the wastage of the products in the other colours.

It is therefore desirable not only to be able to measure the quantities of printing products available in the reservoirs at a given moment but also to be able to predict the quantities necessary for printing a document (provided that this is stored in the form of digital data) or different parts thereof, notably the different pages which make it up. From these two series of information, better management of the use of the printing product resources can be envisaged.

Certain printers are provided with means of measuring the quantity or quantities of printing product available in a reservoir or cartridge

compartment during use. Such a printer is for example described in the application PCT 97/00366. If the printer is connected to a computer, the measurements can be transmitted to it by an interface card and can be processed and/or displayed on a control screen of this computer.

5           US patent 4 413 264 describes a method for predicting the quantity of ink necessary for printing a typographic text in a predetermined grey level. The text is run through so as to determine the number of times each character appears, according to a given typography and with a chosen grey level. The system also has in memory the quantity of ink necessary for printing each  
10   character, for each typography and for each possible grey level. From these data, it is possible to derive therefrom the quantity of ink necessary for printing the text. This system is limited to the printing of texts which are entirely typed in predetermined typographies. It does not make it possible to predict the quantity of ink necessary for printing a document containing graphs or images. This  
15   system is inapplicable for colour reproduction.

          In addition, US patent 5 636 032 describes a system for estimating the number of pages which a printer is able to print. When a document is stored in the form of digital data, it is converted in order to constitute a table describing a monochromatic component of the document in the form of pixels.  
20   Reading such a table makes it possible, in the case of an inkjet printer, to control the ejection of the dots of liquid printing product at predetermined locations on the sheet of paper, constituting the coordinates of the different pixels. It is said that a pixel is "switched on" in such a table if the cell corresponding to this pixel contains information indicating that a droplet of  
25   printing product must be ejected at this pixel location.

          According to the teachings of this prior patent, at the very time of printing one of the pages, the number of pixels switched on in this page is counted and the quantity of quantities of printed product used to print it is derived. To this end, for each ink reservoir which can be used by the printer,  
30   the mean volume of ink necessary for printing a pixel is stored. However, the process can effect only a relatively imprecise estimation of the quantities necessary since it is implemented simultaneously with the printing of a page.

The estimation therefore assumes that all the pages which remain to be printed will require the same quantities of printing product as before. This is not always the case in practice. For example, if the document in question includes a text followed by graphics and drawings, the prediction made on the first pages of the text proves to be completely falsified when it is a case of printing the end of the document, of a completely different nature.

The invention makes it possible to resolve this problem by proposing a method of predicting the quantity of a printing product necessary for printing a document, which is reliable and precise, whatever the nature of the document.

More precisely, the invention concerns a method of predicting the quantity of a printing product necessary for printing a document, characterised in that it consists of storing the entire document in the form of digital data, creating, from these data, a table describing at least part of a monochromatic component of said document, said component corresponding to the printing product and each cell in said table representing a pixel, counting the number of pixels said to be switched on in this table and deriving therefrom a necessary quantity of said printing product before enabling or demanding said printing.

Thus the use of the method set out above makes it possible to produce information which can be used by a user. This information can for example be the display of the quantities of printing product necessary for printing an entire document stored. If the document stored in digital form has previously been broken down into a certain number of pages, the information can consist of indicating the quantities necessary for printing each page. This will make it possible to evaluate the cost of printing a document, in total or page by page.

In addition, if the process indicated above has been initialised or reset to zero on start-up or when a reservoir is changed for the corresponding printing product, it will be possible easily to count the quantities successively employed for printing different documents and to derive therefrom the quantity of printing product remaining in each reservoir. The quantity or quantities can also be displayed. Likewise, at the time of printing the document stored lastly, it will be possible, from these informations, to determine whether the entire

document can be printed without changing at least one of the reservoirs or, failing this, the number of pages which can be printed.

The method which has just been disclosed will preferably be implemented in a computer connected to a printer. In addition, the use of computers in a network is becoming more and more frequent. Under these conditions, if a computer contains a document stored in digital form, it will be possible to cause this document to be printed by a specific printer connected to another computer in the network. The prediction can be calculated by the computer containing the document before the latter is transmitted in digital form to another computer specifically connected to the printer in question. In this case, the necessary parameters relating to the characteristics of the printer and the printing product and those relating to the choice of the printing mode can be exchanged by the network between the computers.

In order to avoid the representation of the monochromatic component or components of said document in the form of pixels occupying too much space in the memory of the computer, the method according to the invention is supplemented by the fact that an aforementioned table is created with limited capacity, less than the capacity necessary for describing the monochromatic component or components of said document. Groups of pixels of said monochromatic component are entered successively therein and on each occasion the number of pixels switched on are counted until the whole of said monochromatic component has been entered in said table and all its switched-on pixels have been counted.

Preferably, each table of limited capacity is created from digital data representing adjacent bands of the document.

In order to be able to apply, to the digital data represented in the form of pixels, corrections desirable for printing, by using known correction algorithms, the method according to the invention makes provision for selecting wider, overlapping bands of said document. From digital data corresponding to the wider bands, at least one enlarged table is created allowing an image reprocessing entailing a modification of the switched-on pixels. Consequently, the enlarged table is modified by applying a known correction algorithm and the

switched-on pixels corresponding to the excess part of the large table, that is to say the part where the bands overlap, are excluded from the counting.

In the case of a colour printing, as many enlarged tables as there are colours are created, each one describing a monochromatic component of the document. In a manner known per se, a correction algorithm is applied to each table before separately effecting the counts of the switched-on pixels so as to predict the different quantities of the printing products necessary, of all the colours concerned, in order to print part of the document corresponding to a band. After which, the tables reset to zero receive the pixels of the following band.

When the switched-on pixels have been counted, it suffices to multiply their number by a value representing an elementary quantity of the printing product. In the case of an inkjet printer, the value in question represents the volume of a dot of printing product ejected on each occasion by the print head. Obviously this value depends on the printing product, as indicated previously. It also depends on the type of printer and/or the type of print head. The computer can easily contain in memory a set of such values taking into account all the equipment and products available on the market and it will be in a position to select one of them according to an effective combination of such parameters.

Naturally, the invention also concerns a device for predicting the quantity of a printing product necessary for printing a document, characterised in that it has a means for storing the whole of said document in the form of digital data, means for creating, from these data, a table describing at least part of a monochromatic component of said document, said component corresponding to said printing product and each cell in said table representing a pixel, means for counting the number of so-called switched-on pixels in this table and means for deriving therefrom a necessary quantity of said printing product before enabling or demanding said printer.

Another object of the invention is to improve the management of the printing product resources used by the colour printer, notably in connection with the printer, by combining the predictions of the quantities of printing product

necessary for printing a document and the actual measurements of quantities of printing products available in the reservoirs of the printer at the time when it is wished to print.

The basic idea consists of choosing the order of printing of the  
5 different pages so that at least several reservoirs are empty or almost empty at the same time.

Consequently, by way of application of the methods defined above, the invention also concerns a method of managing printing product resources available in a colour printer containing several reservoirs of different printing  
10 products, characterised in that it consists of dividing a document stored in the form of digital data, into groups of such data representing pages, predicting, as indicated above, the quantity of each printing product necessary for printing each page, also measuring, before printing, the quantity of printing product actually available in each reservoir, seeking a selection of pages which would  
15 ensure the exhaustion, at least approximately simultaneously, of at least one group of reservoirs, and at least sending a message and/or triggering the implementation of a processing, entailing said selected pages, such as for example the printing of such selected pages.

Amongst the messages which can be displayed, there can be  
20 mentioned the prediction of the quantities of printing products necessary for printing each page, the quantities available after printing, information on the possibility or impossibility of actually printing the document entirely without having to change at least one reservoir. In particular the information broadcast can also indicate the pages of the document (for example identified by their  
25 numbers) which it is possible to print without having to change at least one reservoir, knowing that any selection of such pages may make it possible to waste less printing product, notably if certain reservoirs form part of the same cartridge.

The step consisting of seeking a selection of pages which will  
30 ensure the simultaneous exhaustion of at least one group of reservoirs takes longer to implement, the higher the number of pages. There is an advantage in seeking whether part of the document to be printed can be printed in the natural

order of the pages and nevertheless allow the almost simultaneous exhaustion of at least several reservoirs.

Consequently, the method defined above can be supplemented by the operations consisting of predicting the quantity of each printing product necessary to print the pages in their natural order, updating after each series of predictions concerning a page the quantity of each printing product which would actually be available in each reservoir, checking after each updating whether at least several reservoirs are almost empty, actually printing the pages thus tested and at least sending a message indicating the need to change or fill the reservoirs.

After the change of the reservoirs concerned, the processing is resumed on the remaining pages, considering a reduced number of pages. During the processing of the pages in their natural order, the predicted quantities of products consumed for each page are stored in memory, with a view to a possible need for selection.

It should be noted that the operations consisting of predicting the quantity of each printing product necessary for printing each page can be made a priori as soon as the document has been divided, in digital form, into groups of digital data representing pages.

As will be seen subsequently, the predictions can be made once and for all and, in this case, an operation consisting of predicting a quantity of printing product necessary for printing a page is summarised as seeking the precalculated value in a memory where it was previously recorded. A prediction operation can therefore, according to circumstances, consist of an actual calculation which will be disclosed below or a simple reading of a stored value, previously calculated during the unfolding of a global and autonomous prediction process for the quantities of printing products necessary for printing each page.

The implementation of a process of selecting pages proper is triggered by a particular test. More particularly, it is checked page after page whether there is a change from a state where all the reservoirs in said group are not empty to a state where at least one of them is completely empty. It is

decided to implement such a selection when this event occurs. When such a selection is decided on and if the quantities of printing product necessary have not been calculated previously, a prediction is made of the quantity of each printing product necessary for printing the remaining pages, and they are  
 5 stored. The selection then consists of seeking a subgroup of pages whose printing would result in at least several reservoirs being almost empty at the end of the printing of these pages. Such a selection is notably advantageous if the subgroup is such that all the corresponding reservoirs are structurally connected and form a cartridge. In this case, the selection would result in  
 10 finding the pages to be printed so that all the reservoirs in the cartridge are empty at the end of the printing of said subgroup. As a variant, merely several reservoirs in a cartridge can be empty at the end of the printing of this subgroup. If the selection process ends at a satisfactory solution, said subgroup of pages is actually printed and at least one message is sent  
 15 indicating the need to change or fill the reservoirs.

The method which has just been set out can preferably be essentially implemented in a computer connected to a printer. However, it is becoming more and more frequent to use computers in a network. Under these circumstances, if a computer contains a document stored in digital form, it will  
 20 be possible to have this document printed by a specific printer connected to another computer in the network. The predictions can be calculated by the computer containing the document before the latter is transmitted to the other computer specifically connected to the printer in question. In this case, the necessary parameters relating to the characteristics of the printer and printing  
 25 products and those relating to the choice of the printing mode can be exchanged by the network between the computers.

In order to avoid the representation of the monochromatic component or components of said document in the form of pixels occupying too much space in the memory of the computer, the method according to the  
 30 invention is supplemented by the fact that an aforementioned table is created with limited capacity, less than the capacity for describing the monochromatic component or components of said document. Groups of pixels of said

monochromatic component are entered successively therein and on each occasion the number of pixels switched on are counted until the whole of said monochromatic component has been entered in said table and all its switched on pixels have been counted.

5                    Preferably, each table of limited capacity is created from digital data representing adjacent bands of the document.

                  In order to be able to apply, to the digital data represented in the form of pixels, corrections desirable for printing, by using known correction algorithms, the method according to the invention makes provision for selecting  
10 wider, overlapping bands of said document. From digital data corresponding to the wider bands, at least one enlarged table is created allowing an image reprocessing entailing a modification of the switched-on pixels. Consequently, the enlarged table is modified by applying a known correction algorithm and the switched on pixels corresponding to the excess part of the large table, that is to  
15 say the part where the bands overlap, are excluded from the counting.

                  In the case of a colour printing, as many enlarged tables as there are colours are created, each one describing a monochromatic component of the document. In a manner known per se, a correction algorithm is applied to each table before separately effecting the counts of the switched on pixels so  
20 as to predict the different quantities of the printing products necessary, of all the colours concerned, in order to print part of the document corresponding to a band. After which, the table reset to zero receives the pixels of the following band.

                  When the switched-on pixels have been counted, it suffices to  
25 multiply their number by a value representing an elementary quantity of the printing product. In the case of an inkjet printer, the value in question represents the volume of a dot of printing product ejected on each occasion by the print head. Obviously this value depends on the printing product, as indicated previously. It also depends on the type of printer and/or the type of  
30 print head. A computer can easily contain in memory a set of such values taking into account all the equipment and products available on the market and

will be in a position to select one of them according to an effective combination of such parameters.

With regard to the actual measurement of the quantity or quantities of printing product available in the corresponding reservoir or reservoirs, it will  
 5 be possible, for each reservoir, to arrange a capacitive branch including said reservoir to apply an alternating signal to this capacitive branch and to analyse a resulting signal in order to derive therefrom said quantity of printing product actually available in this reservoir.

Naturally, the invention also concerns a device for managing printing  
 10 product resources available in a colour printer containing several reservoirs of different printing products, characterised in that it has means for dividing a document stored in the form of digital data into groups of such data representing pages, means for predicting the quantity of each printing product necessary for printing each page, means for measuring, before printing, the quantity of printing  
 15 product actually available in each reservoir, means for seeking a selection of pages which will ensure the exhaustion, at least approximately simultaneously, of at least one group of reservoirs, and means for sending a message and/or triggering the implementation of a processing, entailing said selected pages, such as for example the printing of such selected pages.

20 The invention will be more clearly understood by means of the following description of a computer system comprising a printer and at least one computer equipped and programmed to implement the invention, given solely by way of example and with reference to the accompanying drawings, in which:

- Figure 1 is a block diagram of a computer/printer assembly  
 25 implementing the invention;

- Figure 2 is a block diagram of the means specific to implementing the invention for predicting the quantity of each printing product necessary for printing a colour document stored in the form of digital data;

- Figure 3 is a flow diagram describing the implementation of the  
 30 prediction method;

- Figure 4 is a block diagram of a printer incorporating means of measuring the actual quantity of printing product contained in each reservoir;

- Figure 5 is a view of the colour printer with its printing product reservoirs;

- Figure 6 is a flow diagram of the global implementation of the method of the invention; and

5           - Figure 7 is a flow diagram of the implementation of a selection of pages, constituting a step of the method.

A device able to implement the invention can be integrated into a printer. However, and preferably, it can consist of a computer 20 connected to different peripherals including notably a printer.

10           This is what is depicted in Figure 1. The computer has a communication interface 510 connected to a communication network 400 by means of which it can notably exchange information with other computers. It also has a storage means 506 known as a "hard disk", a disk drive 507 and a CD drive 508. These drives can respectively receive a diskette 700 and a CD  
15 701. These components, and the hard disk 506, can contain documents within the meaning of the invention, and the code for implementing the invention which, once read by the computer 20, will be stored in the hard disk 506. According to a variant, the program enabling the computer to implement the invention can be stored in read only memory 501 (designated ROM in Figure  
20 1). According to another possible variant, the program can be loaded as required in order to be stored in identical fashion to that described above, by means of the network 400.

The computer is supplemented by a screen 503 for displaying the documents to be printed, serving as an interface with the user who wishes to  
25 modify these documents, by means of a keyboard 504 and/or a mouse 505 or any other control means. The screen 503 also makes it possible, at the request of the user, to display the volumes of the different printing products which will be liable to be consumed by the printer 210 if a document available in the form of digital information in the computer or one of its peripherals is to be printed.  
30 These volumes can be determined and displayed for each page. The instructions relating to the implementation of the method according to the invention are executed by a central unit 500 (CPU in Figure 1). The instructions

are stored in the read only memory 501 or in the other information storage elements available. On powering up, the programs relating notably to the implementation of the invention, stored in one of the non-volatile memories, such as for example the read only memory 501, are transferred into a random  
 5 access memory 502 (RAM in Figure 1), which then contains the executable code of the invention and the variables and parameters necessary to its implementation.

The different subassemblies of the computer 20 which have just been mentioned exchange information with each other by means of a  
 10 communication bus 512, which also makes it possible, by virtue of the interface 510, to route information coming from the network 400 or to transmit information to this network. Where it is a case of any reproduction of images, a digital camera 800 can be connected to the bus 512.

Figure 2 depicts a functional block diagram of a device 100 able to  
 15 implement the method of predicting the quantity or quantities of printing product necessary to the printing, page by page, of a document, provided that it is functionally interposed between a file 1 containing the document in the form of digital information and a screen 11 able to display the results, that is to say the quantities of the printing product necessary for printing the document stored in  
 20 the file 1. The device can, as has been seen, be comprised in the computer, but it can also be produced in the form of a self-contained unit housed in the printer itself or forming part of an interface circuit. The device has a page divider 2 responsible for dividing the electronic document stored in the file 1 into groups of information, each group representing a page. Each page contains a  
 25 more or less large part of the document according to the format chosen for reproduction, the size of the sheets of paper, etc. The information representing each page is then divided into wider bands by a broadened band divider 3. It should be stated that such a broadened band consists of the digital information representing a band of the page under consideration increased by an overlap margin belonging to the following band. The broadened band information  
 30 determined by the divider 3 is transmitted to a conversion system, referred to as "rasteriser" 4, which transforms the digital information transmitted by the divider

3 into several tables  $T_a, T_b, T_c, T_d \dots$  each describing part of a monochromatic component of the document, each cell of the table representing a pixel. More precisely, each cell of a table (memory) contains the coordinates of a pixel and an item of information representing the fact that this pixel is "switched on" or not. In the example, the part of the monochromatic component is that which corresponds to the broadened band currently being processed. If the document to be printed is monochromatic (black ink for example), the rasteriser generates and fills a single table. If it is a case of a document to be printed in colour, the rasteriser 4 generates as many tables  $T_a, T_b, T_c, T_d$  as there are monochromatic components necessary for printing the document, for example black, cyan, magenta and yellow. Each table is then subjected to the action of a corrector 5 able to apply to the table a correction entailing modifications to the switched-on pixels, improving the quality of the document to be printed. The corrector 5 implements known algorithms. When the corrector has applied such algorithms in order to modify the switched-on pixels in the different tables  $T_i$ , these are read and the so-called switched-on pixels are counted by a switched-on pixel counter 6. It should be noted that this counter counts only the "useful" switched-on pixels of the table or tables, that is to say the pixels corresponding to the band under consideration, not including the margin overlapping with the following band. The results of these countings are sent to a calculator for the volumes of printing product, which multiplies the number of pixels switched on in each table by a predetermined quantity calculated from information selected in memories 7, 8 and 9.

For example, the memory 7 makes it possible to select a parameter representing the model of the printer. The memory 8 makes it possible to select a parameter representing the type of reservoir or cartridge. The memory 9 makes it possible to select a parameter representing the printing product used.

All these parameters make it possible to calculate the mean volume of a droplet of printing product ejected at the location of each switched on pixel. The computer 10 determines the volumes of corresponding printing product and, when all the bands of all the pages of the document have been analysed,

the calculator 10 can demand the display, on the screen 11, of the volumes of the different printing products necessary for printing each page on the one hand and the entire document on the other hand.

In addition, according to the invention, information on a selection of  
 5 pages to be printed in order to optimise the consumption of printing product are also displayed on the screen 11, after implementing the method described below.

Figure 3 is a flow diagram describing more precisely the operations performed during the implementation of the prediction process, for example by  
 10 means of the computer in Figure 1 connected to its printer 210 or to a printer accessible through the network 400 via another computer. The starting point is a file 101 in which the document to be printed is stored in the form of digital information.

The following operation 102 consists of initialising the total volumes  
 15 of the printing products in a memory, which will be consulted for the final display. The following operation 103 consists of reserving, in the system, the memory capacity necessary for creating as many enlarged tables as there are different printing products needed for printing the document.

The operation 104 consists of selecting a first page in the digital  
 20 information contained in the file 101.

The operation 105 is a test for checking whether the last page has been processed.

If the response is no, the step 106 is passed to, initialising the quantities of printing products necessary for a page, in a memory reserved for  
 25 this purpose, which will be consulted for the final display.

The following step 107 consists of selecting a first broadened band in this page.

The step 108 is a test for determining whether all the bands of the page have been processed.

If the response is no, step 109 is passed to, which consists of  
 30 initialising all the enlarged tables corresponding to the different monochromatic components of the band.

The following step 110 (rasterisation) consists of filling all the enlarged tables corresponding respectively to the monochromatic components of the broadened band currently being processed.

5 The operation 111 consists of applying the correction algorithms to all the enlarged tables of said broadened band.

The operation 112 consists of choosing one of these tables with a view to counting the switched-on pixels in it.

The operation 113 is a test which checks whether all the tables corresponding to a broadened band have been processed.

10 If the response is no, step 114 is passed to, which consists of counting the "useful" pixels of the table under consideration.

15 The step 115 consists of calculating the quantity of corresponding printing product. This calculation takes account of the values of the parameters selected in different memories 7, 8 and 9 as in the case of Figure 2, in order to take account of the model of printer, the type of cartridge used and the printing product itself.

The operation 116 consists of adding the quantity calculated at operation 115 to the quantities previously counted and added.

20 At the operation 117, the following enlarged table is selected and step 113 is returned to.

When all the tables have been processed, the response to the test 113 becomes positive and a step 118 is passed to, consisting of selecting the following broadened band before returning to the test 108.

25 When the response at the test 108 becomes positive, this means that all the pages have been tested and step 119 is passed to, which consists of processing the following page, returning to the test 105.

30 When all the pages have been processed, the test 105 becomes positive and it is then possible to display the total quantities (step 120) of all the printing products necessary for printing the entire document as well as the partial quantities (step 121) indicating the corresponding quantities necessary for printing each page.

Naturally, the invention also relates to any device (that is to say any equipment or set of equipment connected together) having means for implementing the method described above. These means have been described here with reference to Figures 1 and 2. In this case, such a device

5 can consist of at least one computer and one printer, or even two computers connected in a network with at least one printer.

The invention covers any storage means such as a magnetic tape, diskette, CD-ROM (fixed-memory compact disc) or rewriteable compact disc, integrated or not into the device, possibly removable, and provided that it

10 contains a program at least partially implementing the method described. Such a storage means can be read by a computer or microprocessor for implementing the method.

In addition to the means of predicting the quantities of printing products necessary for printing each page, as described above, other

15 developments of the invention can require the use of means of measuring the quantities of printing products actually available in the reservoirs.

Considering more particularly Figure 4, a printer 210 is depicted, which is here a colour printer receiving data to be printed DI representing a text or an image, by means of a parallel input/output port 307, connected to the

20 network 400 and linked to an interface circuit 306, itself linked to an ink ejection control circuit 310 which controls the print heads 313a, 313b, 313c, 313d via an amplification circuit 314. The print heads are respectively connected to printing product reservoirs 312a, 312b, 312c, 312d. According to the example, each reservoir is connected by a pipe to the corresponding print head 313a-313d

25 which is electrically connected to earth by means of a low-value resistor 323a-323d. The reservoir 312a contains a black printing product for monochrome or four-colour printing. The reservoirs 312b, 312c, 312d contain printing products of different colours, for colour printing. The three colours are conventionally magenta, cyan and yellow.

30 In the example, the reservoirs 312a-312d and the print heads 313a-313b are mounted on a carriage made to move along guidance means formed by parallel rods and rails. The carriage is moved in a reciprocating motion

along these guidance means. It is driven by a motor 302, by means of a belt mechanism, well-known to persons skilled in the art. The movement path of the carriage and therefore of the print heads 313a-313d is parallel to a line to be printed on a printing medium such as a sheet of paper. This printing medium is  
 5 moved at right angles to the movement parts of the carriage by the mechanism of the printer, known per se.

The printer also has a main data processing circuit 300 associated with a read only memory 303 and a random access memory 309. The read only memory 303 contains the operating programmes of the main processing  
 10 circuit whilst the random access memory 309, also associated with the printing product ejection control circuit 310, temporarily stores the data received by means of the interface 306 and the data produced by the main processing circuit 300. The latter is connected to a display 304 on which it controls the display of messages indicating the functioning of the printer in general, and in  
 15 particular, as will be seen below, information on the quantity of printing product remaining in the reservoir. This information can of course be transmitted to the computer in order to be displayed on the screen 503.

The main processing circuit 300 is connected to a keyboard 305, by which the user can transmit operating commands to the printer. The  
 20 processing circuit also controls the motor 302 which drives the carriage, by means of an amplification circuit 301. This motor is here advantageously of the stepping type.

Means of measuring the quantities of printing products contained in the different reservoirs comprise a capacitive arrangement 308a-308b, selected  
 25 by a selector 325, comprising a reservoir and the corresponding print head as well as a metallic plate 321a, 321b, 321c, 321d constituting one of the plates of a capacitor including the corresponding reservoir.

More precisely, it can be considered that this metallic plate 321a-321d constitutes, from the electrical point of view, a plate of a capacitor  
 30 connected to an extremum detector of detection and measurement means 315 of the printer. The latter are composed more particularly, mounted in cascade, of an amplifier 350 whose input is connected to the plate 321, an extremum

detector 351 controlled by the main processing circuit 300, notably for resetting it to zero, and an analogue to digital converter 352 whose output communicates with the main processing circuit 300. The latter is programmed to detect and store a digital value delivered by the converter 352 and representing a signal  
 5 extremum applied to the input of the amplifier 350 after reinitialisation of the extremum detector 351.

A resonant circuit comprises an oscillator 317 with adjustable frequency, controlled by the main processing circuit 300, whose output is connected to an amplifier 319 which applies signals, through a resistor 322, to  
 10 the resonant circuit comprising an inductor 324 and a selected capacitive arrangement 308a-308d including the plate 321a-321d, the reservoir 312a-312d and its conductive printing product, the print head 313a-313d connected to the reservoir and the low-value resistor 323a-323d connected to earth. The whole forms a capacitive branch equivalent, from the electrical point of view, to  
 15 two capacitors and one resistor connected in series. Thus such a capacitor is formed by the plate 321, the insulating wall of the reservoir 312 as a dielectric and the conductive printing product contained in the reservoir as a second plate of the capacitor. In addition, the print head 313 has a dielectric part and a conducting part which form the other capacitor, the latter being connected to  
 20 earth by the low-value resistor 323. The different plates 321a-321d are connected to the input of the detector 315 and to the other constituents of the resonant circuit by the selector 325 controlled by the circuit 300. By this means, each capacitive branch can be brought into service in succession.

Each measurement of a quantity of product actually available in a  
 25 reservoir consists for example of applying an alternating signal to one of the capacitive branches connected to the remainder of the resonant circuit, seeking the resonance conditions and analysing a resulting signal applied to the input of the detection measurement means 315 in order to derive therefrom the quantity of printing product available in this reservoir.

30 Naturally, the invention can be implemented with any type of system for measuring the quantities of printing products available in the reservoirs; the capacitor system described above being only one example.

Figure 5 depicts the structure of a conventional inkjet colour printer. There can be seen a carriage 60 adapted to receive a printing unit 61, the lower part of which includes the print heads 313a-313d and the top part of which forms a receptacle for the printing product reservoirs. In the example, there can be seen the reservoir of black printing product 312a and an internally compartmentalised cartridge 64 for forming all the reservoirs 312b-312d. Consequently, in this way of arranging the reservoirs, there is a special advantage in having the compartments of the cartridge 64 empty practically simultaneously since the cartridge must be changed as soon as one of the printing products, cyan, magenta or yellow, is exhausted. The process according to the invention described below modifies the order of printing of the pages in order to obtain this result. In order to simplify the description, in drawing up the following flow diagrams, solely three colour printing products, cyan, magenta and yellow, are considered. However, the same process can be used by integrating the monitoring and taking into the account the level of black printing product contained in the reservoir 312a.

Unit 61, once placed on the carriage 60, is driven in a reciprocating movement along a movement path formed by guide rails 67. The motor 302, not visible in Figure 5, drives the carriage 60 by means of a belt device 63. The movement path of the print head is parallel to a line on a printing medium, not shown, such as a sheet of paper. A flat braid of electrical cable 62 establishes the connection between the print head and the remainder of the electronic circuits described with reference to Figure 4.

The flow diagram of Figure 6 illustrates the process of selecting the pages in accordance with the invention in order to optimise the consumption of the printing products, using the data supplied on the one hand by the means of measuring the levels of printing products available in the reservoirs (here the word reservoir designates in fact a compartment of the cartridge 64) and on the other hand the predictions of the quantities necessary for printing each page. In the example, it is assumed that all the quantities necessary have been determined a priori by using a method in accordance with the one described with reference to Figure 3. It is assumed therefore that all these quantities, Ci

for cyan, Mi for magenta and Ji for yellow, are available in a memory of the computer or printer. It is clear that i indicates the number of the page in the natural order of the document.

At step 401, a measurement is made of the actual levels of the quantities actually available in the reservoirs, C, M and J, for example using the capacitive measuring means described with reference to Figure 4.

At step 402, three variables  $C_p = C$ ,  $M_p = M$  and  $J_p = J$  are initialised.

A step 403 is next passed to, initiating a process concerning the first page P1. In other words, the values of index i for  $i = 1$  are considered.

At the step 404, the predicted quantities of printing product necessary for printing the page under consideration will be sought in memory. These quantities are denoted, for the  $i^{\text{th}}$  page,  $V_{Ci}$ ,  $V_{Mi}$  and  $V_{Ji}$ .

At step 405, the levels  $C_p$ ,  $M_p$  and  $J_p$  are updated after (virtual) printing of the page under consideration. The new values are:

$$C_p - V_{Ci} \rightarrow C_p$$

$$M_p - V_{Mi} \rightarrow M_p$$

$$J_p - V_{Ji} \rightarrow J_p$$

As a variant, if, in memory, not all the values  $V_{Ci}$ ,  $V_{Mi}$  and  $V_{Ji}$  are available, step 403 consists of extracting from a file the digital information representing the page and transmitting it to the system of predicting the necessary quantities, previously described. The step 404 then consists no longer of simply reading the values in memory but of calculating them at this moment.

The step 406 is a test which consists of checking whether all the quantities of printing products available in the different reservoirs after virtual printing of the page are close to zero, but positive, with a given tolerance, for example around 5%. If the response at test 406 is negative, the test 411 is passed to, which checks whether one of the values  $C_p$ ,  $M_p$  or  $J_p$  has become "negative", which means that at least one of the printing products is insufficient in quantity in the reservoir to allow correct printing of the page under consideration. If the response at the test 411 is negative, step 413 is passed

to, which consists of checking whether the page which has just been processed virtually is the last page of the document. If the response is no, step 413 is passed to, which consists of "obtaining" the following page in the natural order of the document;  $i = i + 1$  and step 404 is returned to.

5                   If at a given moment of running through the loop which has just been described, the response to the test 406 becomes positive, this means that the natural order of the pages as far as a certain page is suitable for practically simultaneously emptying the reservoirs at the same time. Step 407 is then passed to, which consists of printing pages 1 to  $i$  in the natural order of the document, even if these pages represent only part of the document. Step 408 is then passed to, which consists of displaying a message indicating to the user the need to change the reservoirs, that is to say in this case the cartridge 64. Once this operation has been performed, the process passes to the step 409, which consists of actually measuring the levels C, M and J in order to know the quantities available in the reservoirs which have been replaced. Step 416 which follows is an initialisation step similar to the step 402. As from this moment, the pages which remain are considered to be a reduced document and step 417 is passed to, which consists of "obtaining" the first page of the remaining pages.  $i = 1$  is then considered and the process recommences at step 404.

20                   If at a given moment of running through the process, the response to the test 411 is positive, a step 415 is passed to, which consists of selecting all the remaining pages (not actually printed) in order to define a selection thereof, which is no longer in the natural order of the pages of the document. The process of step 415 will be explained with reference to Figure 7. If this process ends up at a positive result, step 414 is passed to, which consists of printing a selection of pages determined by the process of step 415.

25                   In addition, if at a given moment the response to the test 413 is positive, this means that the entire document can be printed without changing the reservoirs, and the printing step 414 is also passed to.

30                   Figure 7 describes more precisely the process of selecting and ordering the remaining pages triggered when the test 411 indicates that at least

one of the reservoirs does not contain a sufficient quantity of printing product to print a page under consideration.

The flow diagram of Figure 7 depicts the adaptation to the invention of a recursive operational search program (that is to say one capable of calling  
5 itself) of the type "search first in-depth". Such a program is for example described in a work entitled "Elementary Graph Algorithms", second edition, by Robert Sedgewick, chapter 29, page 423, reference ISBN 0 201 06673 4.

In this algorithm, Q represents the list of pages to be processed whilst R represents the list of pages selected in a given order. The purpose of  
10 the processing is therefore to draw up a list R from elements in the list Q removed from it in a certain order. The program commences with a test 601 consisting of checking whether the set Q is empty. If the response is no, operation 602 is passed to, consisting of selecting a page i from the set Q, possibly at random. The operation 603 is then passed to, consisting of  
15 removing the page i from the set Q, and then to the operation 604, consisting of adding the page i to the set R. Next, the operation 605 consists of "calling up" the quantities of printing product V<sub>Ci</sub>, V<sub>Mi</sub> and V<sub>Ji</sub>, already stored. As a variant, if these quantities have not been previously stored, they can be calculated at this stage.

20 Next, the operation 606 consisting of defining temporary variables Ct, Mt and Jt representing the quantities of printing products actually available in the different reservoirs at this moment, that is to say before the virtual printing of the page under consideration. It therefore gives:

$$C_p \rightarrow C_t$$

25  $M_p \rightarrow M_t$

$$J_p \rightarrow J_t$$

The operation 607 consists of calculating the quantities available after printing the page under consideration and consequently obtaining new virtual values for C<sub>p</sub>, M<sub>p</sub> and J<sub>p</sub>. A test 608 is then passed to, consisting of  
30 checking whether each of these quantities is practically zero but positive, for example to within 5%. If the response is no, the test 610 is passed to, which consists of checking whether at least one of these values has become

“negative”. If the response to this test is negative, step 620 is passed to, which in fact symbolises the recursive nature of the program, that is to say the possibility of calling itself for the remainder of the pages. In this case, the other pages are processed by restarting at step 601. If at a given moment the result

5 of the test 601 is positive, the program goes to its end. Each recursive call 620 is followed by a test 621 consisting of checking whether the set R is complete, that is to say whether an order meeting the requirements has been found. If the response is yes, a print instruction is sent and the program ends.

In addition, if the response to the test 608 is positive, this means that

10 a certain number of pages have been found making it possible to empty all the reservoirs practically simultaneously. This information is stored in memory and displayed. The step 609 is then passed to, simulating a change in the reservoirs since the values of  $C_p$ ,  $M_p$  and  $J_p$  become respectively  $C_{max}$ ,  $M_{max}$  and  $J_{max}$ . The step 620 is then passed to, that is to say to the recursive

15 call of the program itself for the remainder of the pages.

In addition, if the test 610 becomes positive, the test 611 is passed to, consisting of checking whether the ratio between Q and R is less than a predetermined value, for example around 5%. If the response is positive, it is considered that the losses of printing products are acceptable and it is decided

20 to print the previous pages, except the last which has ended in a positive test 610. This is the step 627.

Then, at step 628, a message is displayed indicating to the user the need to change the reservoirs (cartridge). The final step is step 629, consisting of printing the remainder of the pages with the printing products of the new

25 cartridge.

If the response to the test 611 is negative, or if the response to the test 621 is negative, this means that there is no possible solution starting from a selection of the page i. In this case, the step 623 is passed to, which consists to returning to the values of  $C_p$ ,  $M_p$  and  $J_p$  before the virtual printing (that is to say step 606) and then to the operation 624, which consists of removing the

30 page i from the set R, and then again to the operation 625, which consists of reintegrating the page i in the set Q. These parameters being restored, the

step 626 is then passed to, which consists of testing another selection starting from another page i whilst refraining from repeating the page i which has just been tested. Step 603 is then passed to again.

5 Naturally, the invention also relates to any device (that is to say any equipment or set of equipment connected to each other) having means for implementing the method described above. These means have been described here with reference to Figures 1, 2, 4 and 7. In this case, such a device can consist of at least one computer and one printer, or even two computers connected in a network with at least one printer.

10 The invention covers any storage means such as a magnetic tape, diskette, CD-ROM (fixed-memory compact disc) or rewritable compact disc, integrated or not into the device, possibly removable, provided that it contains a program at least partially implementing the method described. Such a storage means can be read by a computer or a microprocessor for implementing the  
15 method.

CLAIMS

1. Method of predicting the quantity of a printing product necessary for printing a document, characterised in that it comprises of storing the whole of said document in the form of digital data, creating, from these data, a table (T) describing at least part of a monochromatic component of said document, said component  
5 corresponding to said printing product and each cell of said table representing a pixel, counting (6) the number of so-called switched-on pixels in this table and deriving therefrom a necessary quantity (10) of said printing product before enabling or demanding said printing.

2. Method according to Claim 1, characterised in that an aforementioned  
10 table (T) is created with limited capacity, less than the capacity necessary for describing said monochromatic component of said document, in that groups of pixels of said monochromatic component of said document are entered therein successively, in that on each occasion the number of switched-on pixels is counted (6) until all said monochromatic component of said document has been entered in  
15 said table and its switched-on pixels have been counted.

3. Method according to Claim 2, characterised in that it consists of creating each table of limited capacity from digital data representing adjacent bands (3) of said document.

4. Method according to Claim 3, characterised in that overlapping  
20 broadened bands (3) are selected, in that, using the corresponding digital data, at least one enlarged table (T) is created, allowing an image reprocessing entailing a modification of the switched-on pixels, in that said table is modified by applying a known correction algorithm (5) and in that the counting (6) of the switched-on pixels corresponding to the excess part of said enlarged table is  
25 excluded.

5. Method according to Claim 4 for colour printing, characterised in that as many enlarged tables are created as there are colours, each describing a monochromatic component of said document, in that, in a manner known per se, a correction algorithm is applied to all the tables before separately effecting

the counting (6) of the switched-on pixels in each table for predicting the different quantities of printing products required, of all the colours concerned.

6. Method according to claim 1, characterised in that it includes a calculation step (10) consists of multiplying the number of switched-on pixels by  
5 a value representing an elementary quantity of said printing product.

7. Method according to Claim 6 for an inkjet printing system, characterised in that said value represents the value of a droplet of printing product ejected.

8. Method according to Claim 7, characterised in that said value is  
10 preselected according to predetermined parameters, such as, for example, the type of printer (7) and/or the type of cartridge (8) and/or the type of printing product (9).

9. Method according to Claim 8, characterised in that a set of such values is stored and in that one of them is selected according to an actual  
15 combination of such parameters.

10. Method according to Claim 1, characterised in that said stored document is divided into pages to be printed (2), in that the aforementioned operations are performed in order to determine the number of switched-on pixels (6) corresponding to each page and in that the quantity of printing  
20 product or products necessary for printing each page is derived therefrom.

11. Method according to Claim 10, characterised in that the necessary quantities of the printing product or products for all the pages are added (120).

12. Method according to Claim 1, characterised in that it consists of  
25 producing an item of information which can be used by a user from the determined necessary printing product quantity or quantities.

13. Method according to Claim 1, characterised in that it is implemented in a computer (20) connected to a printer (210).

14. Method according to Claim 1, characterised in that it is implemented  
30 in a computer connected by network (400) to another computer connected to a printer.

15. Device for predicting the quantity of a printing product necessary for

printing a document, characterised in that it has means for storing the whole of said document in the form of digital data, means for creating, from these data, a table describing at least part of a monochromatic component of said document, said component corresponding to said printing product and each cell in said table  
 5 representing a pixel, means for counting (6) the number of so-called switched-on pixels in this table and means for deriving therefrom a necessary quantity (10) of said printing product before enabling or demanding said printing.

16. Device according to Claim 15, characterised in that it has an aforementioned table of limited capacity, less than the capacity necessary for  
 10 describing said monochromatic component of said document, means for successively entering therein groups of pixels of said monochromatic component of said document and means for on each occasion counting (6) the number of switched-on pixels until the whole of said monochromatic component of said document has been entered in said table and its switched-on pixels have been  
 15 counted.

17. Device according to Claim 16, characterised in that it has means for creating each table of limited capacity from numerical data representing adjacent bands (3) of said document.

18. Device according to Claim 17, characterised in that it has  
 20 means for selecting overlapping broadened bands (3), means for creating at least one enlarged table from the corresponding digital data, allowing an image reprocessing entailing a modification of the switched-on pixels, means for modifying said table by applying a known correction algorithm (5) and means for deducting the counting (6) of the switched-on pixels corresponding to the  
 25 excess part of said enlarged table.

19. Device according to Claim 18 for colour printing, characterised in that it has means for creating as many enlarged tables as there are colours, each describing a monochromatic component of said document, means for applying, in a manner known per se, a correction algorithm to all the tables, and  
 30 means for separately effecting the counting (6) of the switched-on pixels of each table for predicting the different quantities of required printing products, of all the colours concerned.

20. Device according to Claim 15, characterised in that it has calculation means (10) for multiplying the number of switched-on pixels by a value representing an elementary quantity of said printing product.

21. Device according to Claim 20 for an inkjet printing system,  
5 characterised in that said value represents the volume of a droplet of ejected printing product.

22. Device according to Claim 21, characterised in that it has means for preselecting said value as a function of predetermined parameters, such as, for example, the type of printer (7) and/or the type of cartridge (8)  
10 and/or the type of printing product (9).

23. Device according to Claim 22, characterised in that it has storage means for storing a set of such values and means for selecting one of them according to an actual combination of such parameters.

24. Device according to Claim 15, characterised in that it has  
15 means for dividing said stored document into pages to be printed (2), means for determining the number of switched-on pixels (6) corresponding to each page and means for deriving therefrom the quantity of printing product or products necessary for printing each page.

25. Device according to Claim 24, characterised in that it has  
20 means (120) for adding the necessary quantities of printing product or products for all the pages.

26. Device according to Claim 15, characterised in that it has means for producing an item of information which can be used by a user from the determined necessary printing product quantity or quantities.

25 27. Device according to Claim 15, characterised in that it has a computer (20) and a printer (210).

28. Device according to Claim 15, characterised in that it has a computer connected by network (400) to another computer connected to a printer.

30 29. Method according to Claim 1, for managing printing product resources available in a colour printer containing several reservoirs of different printing products, characterised in that it consists of dividing (2) a document stored in

the form of digital data, into groups of such data representing pages, predicting (10) the quantity of each printing product necessary for printing each page, also measuring (317, 324, 315), before printing, the quantity of printing product actually available in each reservoir, seeking a selection of pages (415) which would ensure  
 5 the exhaustion, at least approximately simultaneously, of at least one group of reservoirs, and at least sending a message or triggering the implementation of a processing, entailing said selected pages, such as for example the printing of such selected pages.

30. Method according to Claim 29, characterised in that it consists of  
 10 predicting the quantity of each printing product necessary for printing pages in their natural order, updating, after each series of predictions concerning a page, the quantity of each printing product which would actually be available in each reservoir, checking (406) after each updating whether at least several reservoirs are almost empty, actually printing the pages thus tested and at least sending a message (408),  
 15 indicating the need to change or fill the reservoirs.

31. Method according to Claim 30, characterised in that, after changing reservoirs, the processing (417) is resumed on the remaining pages, considering a reduced number of pages.

32. Method according to Claim 30, characterised in that, during the  
 20 processing of the pages in their natural order, the predicted quantities of products consumed for each page are stored, with a view to a possible need for selection.

33. Method according to Claim 29, characterised in that, in order to carry out a selection, it is checked, page after page, whether there is a change  
 25 from a state where all the reservoirs in said group are not empty to a state (411) where at least one of them is completely empty, and such a selection (415) is decided on when this event occurs.

34. Method according to Claim 33, characterised in that, when such a selection is decided on, the quantity of each printing product necessary for  
 30 printing the remaining pages is predicted and stored.

35. Method according to Claim 32, characterised in that, when such a selection is decided on, the quantity of each printing product necessary for printing

the remaining pages is predicted and stored and in that said selection consists of seeking a sub-group of pages (620) whose printing would result in at least several reservoirs being almost empty at the end of the printing of these pages.

36. Method according to Claim 35, characterised in that said sub-  
5 group is such that all the structurally related reservoirs (61) forming a cartridge would be empty at the end of the printing of this sub-group.

37. Method according to Claim 35, characterised in that said sub-  
group is such that several structurally related reservoirs forming a cartridge  
would be empty at the end of the printing of this sub-group.

10 38. Method according to Claim 36, characterised in that said sub-  
group (627) is actually printed when it can be determined and in that at least  
one message (628) is sent indicating the need to change or fill reservoirs.

39. Method according to Claim 29, characterised in that it consists  
of predicting said quantity of such a product necessary for printing such a page,  
15 describing this page by pixels (4) and counting (6) the switched-on pixels  
corresponding to said printing product.

40. Method according to Claim 39, characterised in that the prediction of  
each printing product necessary consists, using said digital data on the page under  
consideration, of creating a table ( $T_a$ ,  $T_b$ ,  $T_c$ ,  $T_d$ ) describing at least part of a  
20 monochromatic component of said document, said component corresponding to said  
printing product and each cell of said table representing a pixel, counting the number  
of switched-on pixels in this table and deriving therefrom a necessary quantity of  
aforementioned corresponding printing product.

41. Method according to Claim 40, characterised in that an  
25 aforementioned table (T) is created with limited capacity, less than the capacity  
necessary for describing said monochromatic component of said page, in that there  
are entered successively therein groups of pixels of said monochromatic component  
of said page, in that on each occasion the number of switched-on pixels are counted  
until all said monochromatic component of said page has been entered in said table  
30 and its switched-on pixels have been counted (Figure 3).

42. Method according to Claim 41, characterised in that it consists of creating each table of limited capacity from digital data representing adjacent bands of said page.

43. Method according to Claim 42, characterised in that overlapping  
5 broadened bands are selected, in that, using the corresponding digital data, at least one enlarged table (103) is created, allowing an image reprocessing entailing a modification of the switched-on pixels, in that said table is modified by applying a known correction algorithm (111) and in that the counting of the switched-on pixels corresponding to the excess part of said enlarged table is  
10 excluded.

44. Method according to Claim 43 for colour printing, characterised in that as many enlarged tables (103) are created as there are printing products, each describing a monochromatic component of said page, in that, in a manner known per se, a correction algorithm (111) is applied to all the tables  
15 before separately effecting the counting of the switched-on pixels in each table for predicting the different quantities of printing products required, of all the colours concerned.

45. Method according to Claim 40, characterised in that it includes a calculation step consists of multiplying (10) the number of switched-on pixels by  
20 a value representing an elementary quantity of said printing product.

46. Method according to Claim 45 for an inkjet printing system, characterised in that said value represents the value of a droplet of printing product ejected.

47. Method according to Claim 46, characterised in that said value  
25 is preselected according to predetermined parameters, such as, for example, the type of printer (7) and/or the type of cartridge (8) and/or the type of printing product (9).

48. Method according to Claim 47, characterised in that a set of such values is stored and in that one of them is selected according to an actual  
30 combination of such parameters.

49. Method according to Claim 1, characterised in that the measurement or measurements of a quantity of product actually available

consist of arranging a capacitive branch including said reservoir (312a, 312d), applying an alternating signal (317) to this capacitive branch and analysing a resulting signal (315) in order to derive therefrom said quantity of printing product actually available.

5                    50. Device according to Claim 15 for managing printing product resources available in a colour printer containing several reservoirs of different printing products, characterised in that it has means for dividing (2) a document stored in the form of digital data, into groups of such data representing pages, means for predicting (10) the quantity of each printing product necessary for printing each  
10                    page, means for measuring (317, 324, 315), before printing, the quantity of printing product actually available in each reservoir, means for seeking a selection of pages (415) which would ensure the exhaustion, at least approximately simultaneously, of at least one group of reservoirs, and means for sending a message and/or triggering the implementation of a processing, entailing said selected pages, such as for  
15                    example the printing of such selected pages.

                    51. Device according to Claim 50, characterised in that said means for predicting being used for predicting the quantity of each printing product necessary for printing pages in their natural order, it has means for updating, after each series of predictions concerning a page, the quantity of each printing  
20                    product which would actually be available in each reservoir, means for checking (406), after each updating, whether at least several reservoirs are almost empty, and means for sending a message (408), indicating the need to change or fill reservoirs.

                    52. Device according to Claim 51, characterised in that it has means  
25                    for storing the predicted quantities of products consumed for each page, during a processing of the pages in their natural order, with a view to a possible need for selection.

                    53. Device according to Claim 52, characterised in that it has means for predicting the quantity of each printing product necessary for printing the  
30                    remaining pages and means for storing them, when a selection is decided on.

                    54. Device according to Claim 52, characterised in that it has means for predicting the quantity of each printing product necessary for printing the

remaining pages and means for storing them when a selection is decided on and in that said means for seeking a selection include means for seeking a sub-group of pages (620) whose printing would result in at least several reservoirs being almost empty at the end of the printing of these pages.

5           55. Device according to Claim 50, characterised in that it has means for predicting said quantity of such a product necessary for printing such a page, comprising means for describing this page by pixels (4) and means for counting (6) the switched-on pixels corresponding to said printing product.

10           56. Device according to claim 55, characterised in that it has means for creating a table ( $T_a$ ,  $T_b$ ,  $T_c$ ,  $T_d$ ) describing at least part of a monochromatic component of said document, said component corresponding to said printing product and each cell of said table representing a pixel, means for counting the number of switched-on pixels in this table and means for deriving therefrom a necessary quantity of aforementioned corresponding printing product.

15           57. Device according to Claim 56, characterised in that it has an aforementioned table of limited capacity, less than the capacity necessary for describing said monochromatic component of said page, means for successively entering therein groups of pixels of said monochromatic component of said page and means for on each occasion counting the number of switched-on pixels until the  
20 whole of the said monochromatic component of said page has been entered in said table and its switched-on pixels have been counted (Figure 3).

          58. Device according to Claim 57, characterised in that it has means for creating each limited-capacity table from digital data representing adjacent bands of said page.

25           59. Device according to Claim 58, characterised in that it has means for selecting overlapping broadened bands, means for creating at least one enlarged table (103) from the corresponding digital data, allowing an image reprocessing entailing a modification of the switched-on pixels, means for modifying said table by applying a known correction algorithm (111) and means  
30 for deducting the counting of the switched-on pixels corresponding to the excess part of said enlarged table.

60. Device according to Claim 59 for colour printing, characterised in that it has means for creating as many enlarged tables (103) as there are printing products, each describing a monochromatic component of said page, means for applying, in a manner known per se, a correction algorithm (111) to  
 5 all the tables and means for separately effecting the counting of the switched-on pixels of each table for predicting the different quantities of required printing products, of all the colours concerned.

61. Device according to Claim 56, characterised in that it has calculation means for multiplying (10) the number of switched-on pixels by a  
 10 value representing an elementary quantity of said printing product.

62. Device according to Claim 61 for an inkjet printing system, characterised in that said value represents the volume of a droplet of ejected printing product.

63. Device according to Claim 62, characterised in that it has  
 15 means for preselecting said value as a function of predetermined parameters, such as, for example, the type of printer (7) and/or the type of cartridge (8) and/or the type of printing product (9).

64. Device according to Claim 63, characterised in that it has storage means for storing a set of such values and means for selecting one of  
 20 them according to an actual combination of such parameters.

65. Device according to Claim 50, characterised in that said means for measuring a quantity of product actually available include a capacitive branch including said reservoir (312a, 312d), means for applying an alternating signal (317) to this capacitive branch and means for analysing a resulting signal  
 25 (315) in order to derive therefrom said quantity of printing product actually available.

66. Information storage means, characterised in that it contains a program at least partially implementing the method according to one of Claims 1 or 29.

67. Storage means according to Claim 66, characterised in that it is  
 30 chosen from the group of devices including a magnetic tape, a magnetic diskette, a fixed-memory compact disc and a rewriteable compact disc.

68. Storage means according to Claim 66, characterised in that it can be read by a computer or a microprocessor.

## ABSTRACT

“Method and device for predicting the quantity of printing product available in a printer and necessary for printing a document”

Prediction of a quantity of printing product necessary for printing a document stored in memory and managing the printing product resources available in a printer.

According to the invention, all the documents are stored in the form of digital data and there is created, from these data, at least one table describing at least part of a monochromatic component of said document, said component corresponding to a given printing product and each cell of said table representing a pixel, the number of so-called “switched on” pixels in this table is counted and there is derived therefrom a necessary quantity of the printing product before demanding said printing.

FIG 1

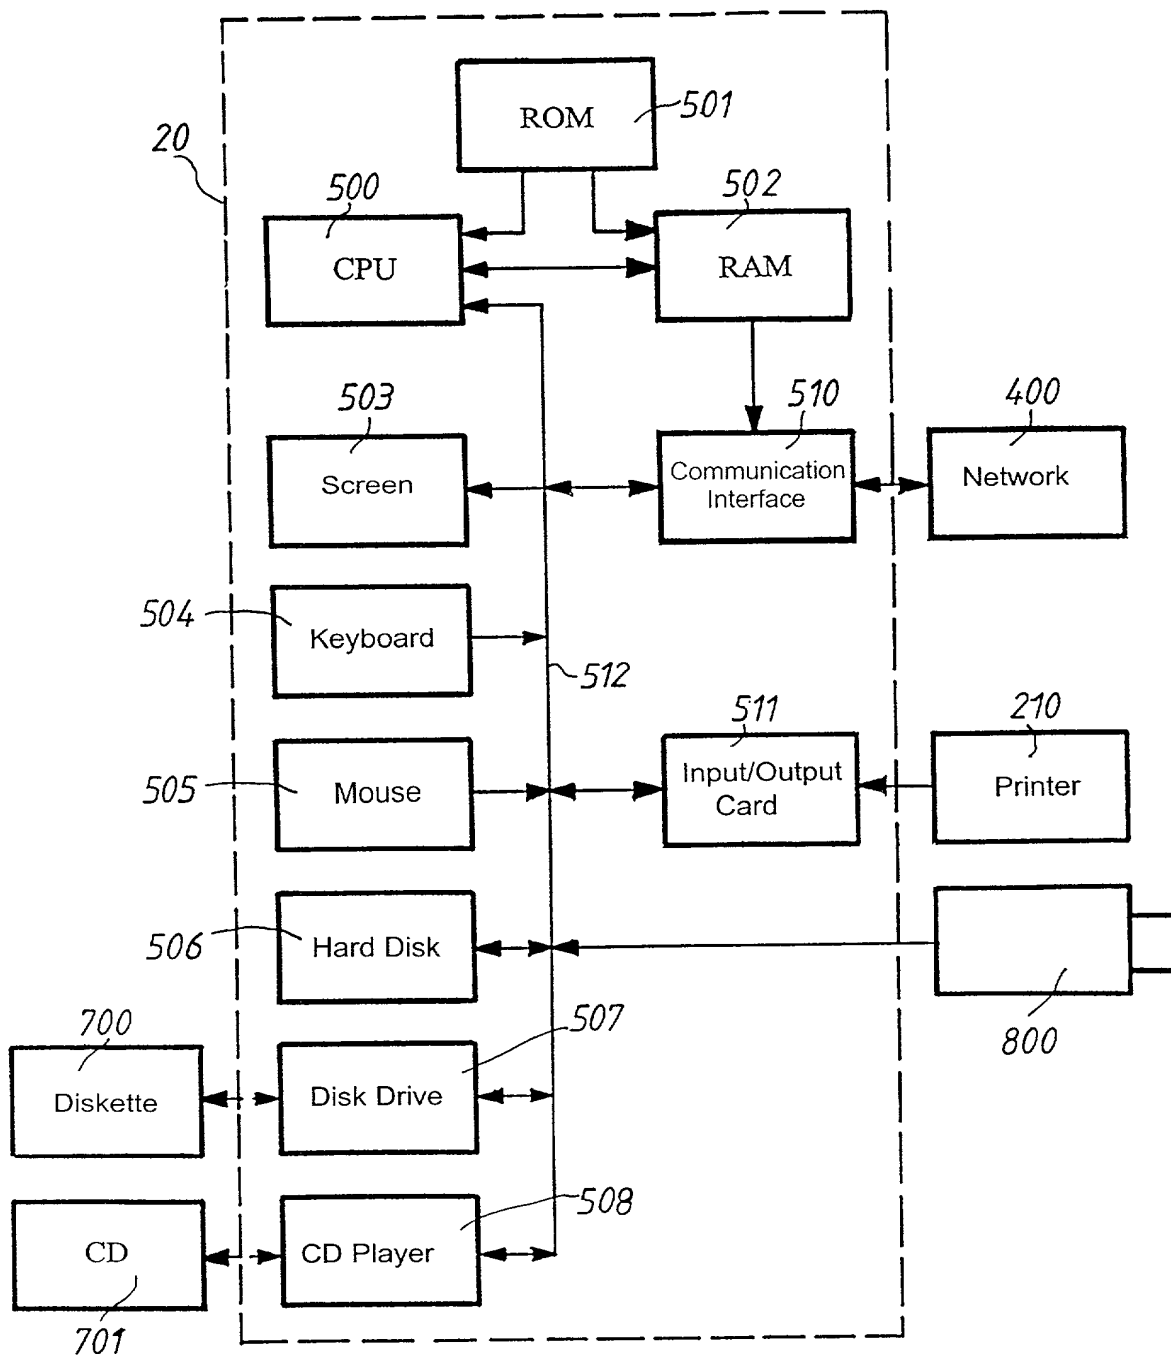
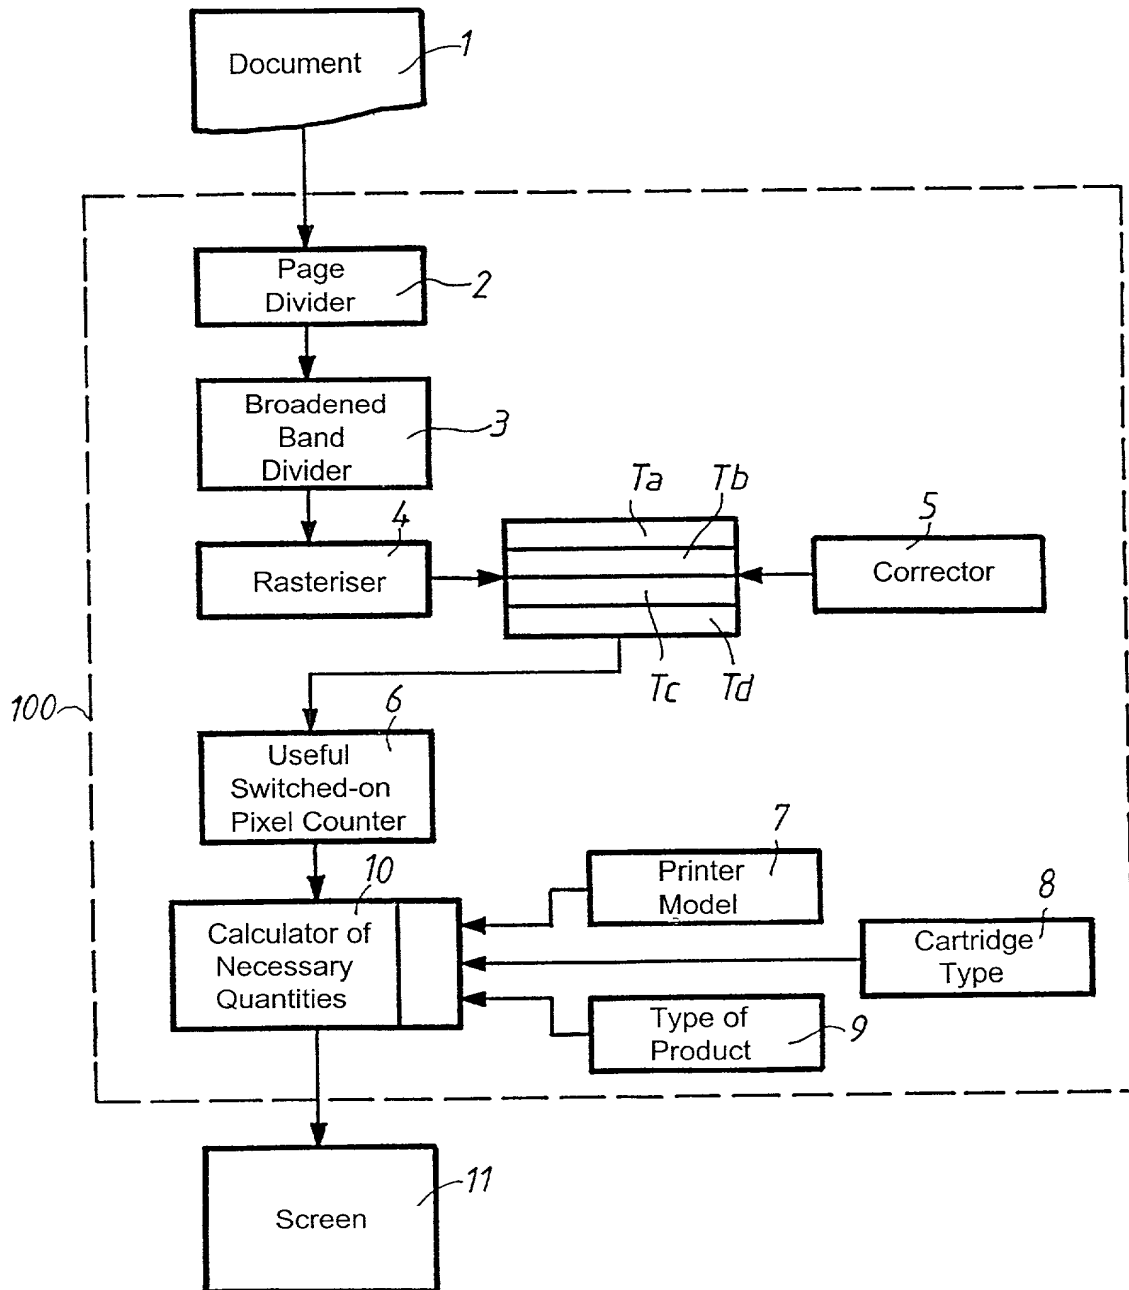


FIG 2



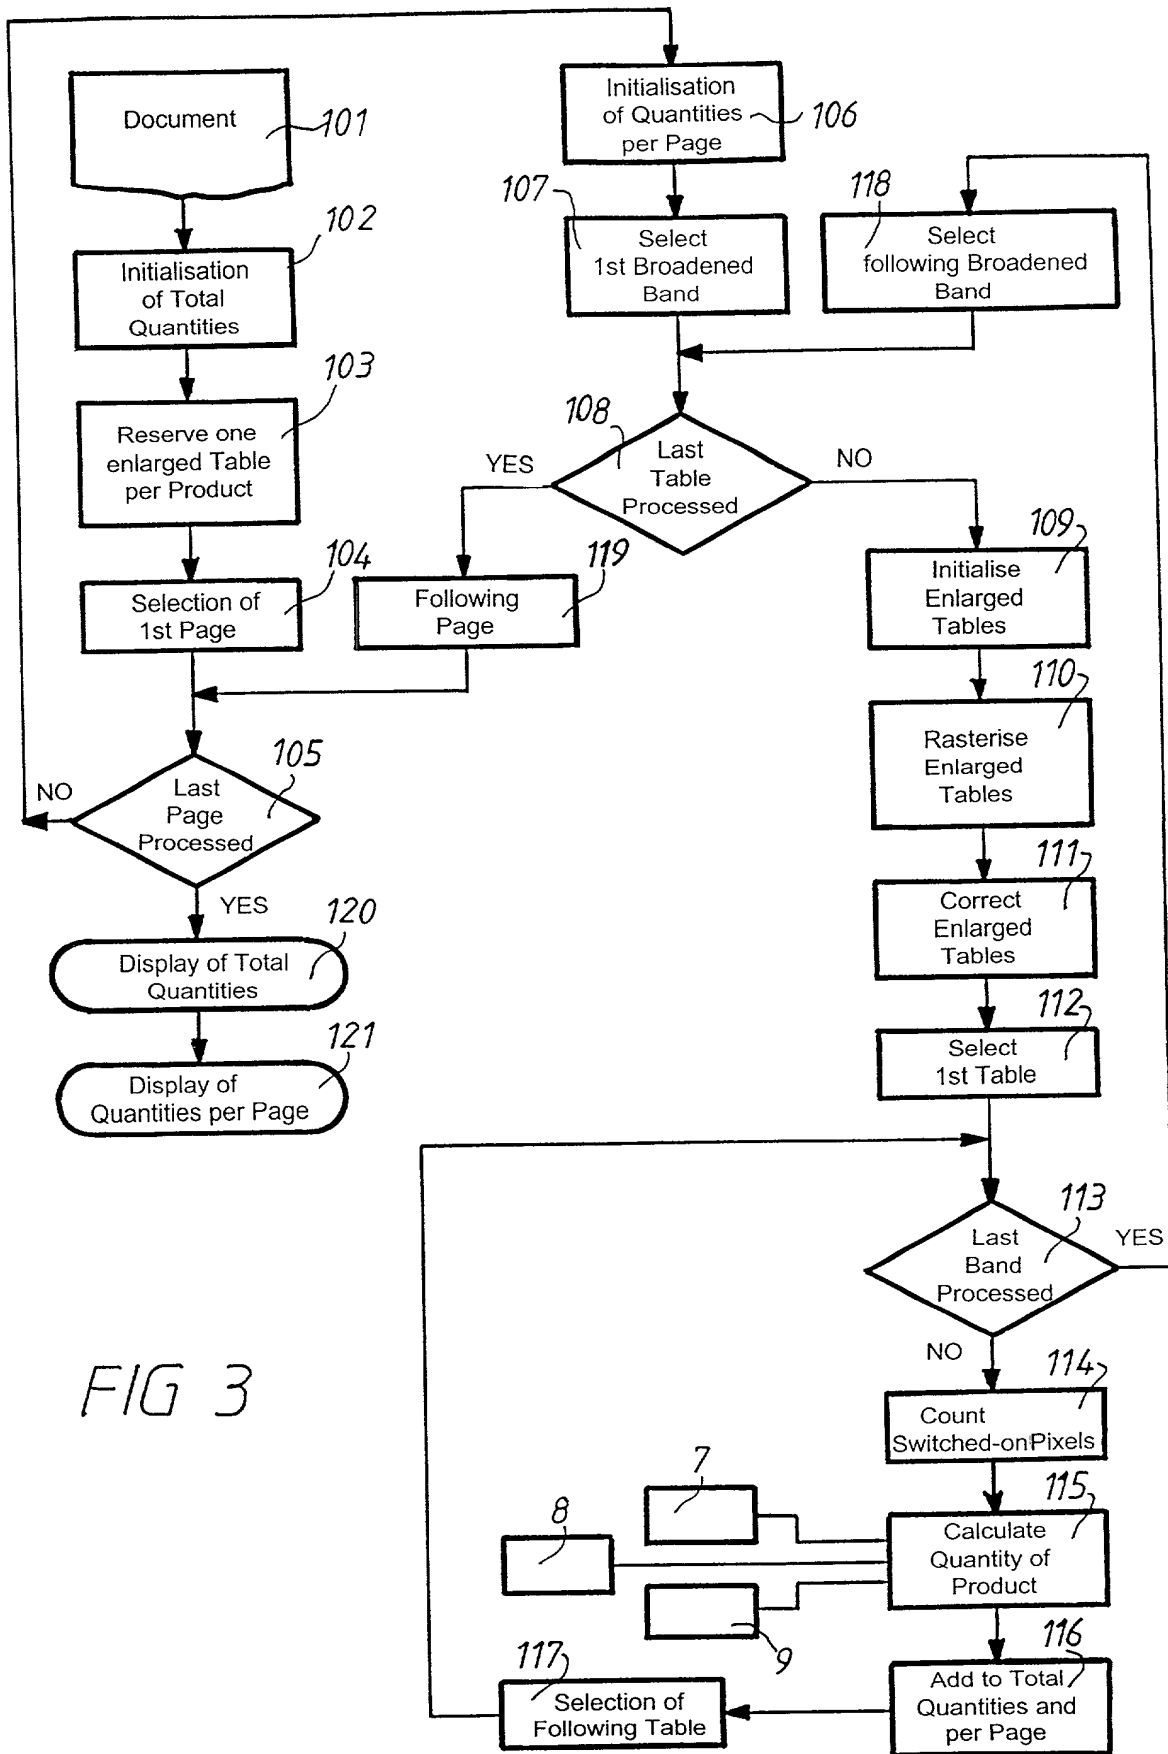
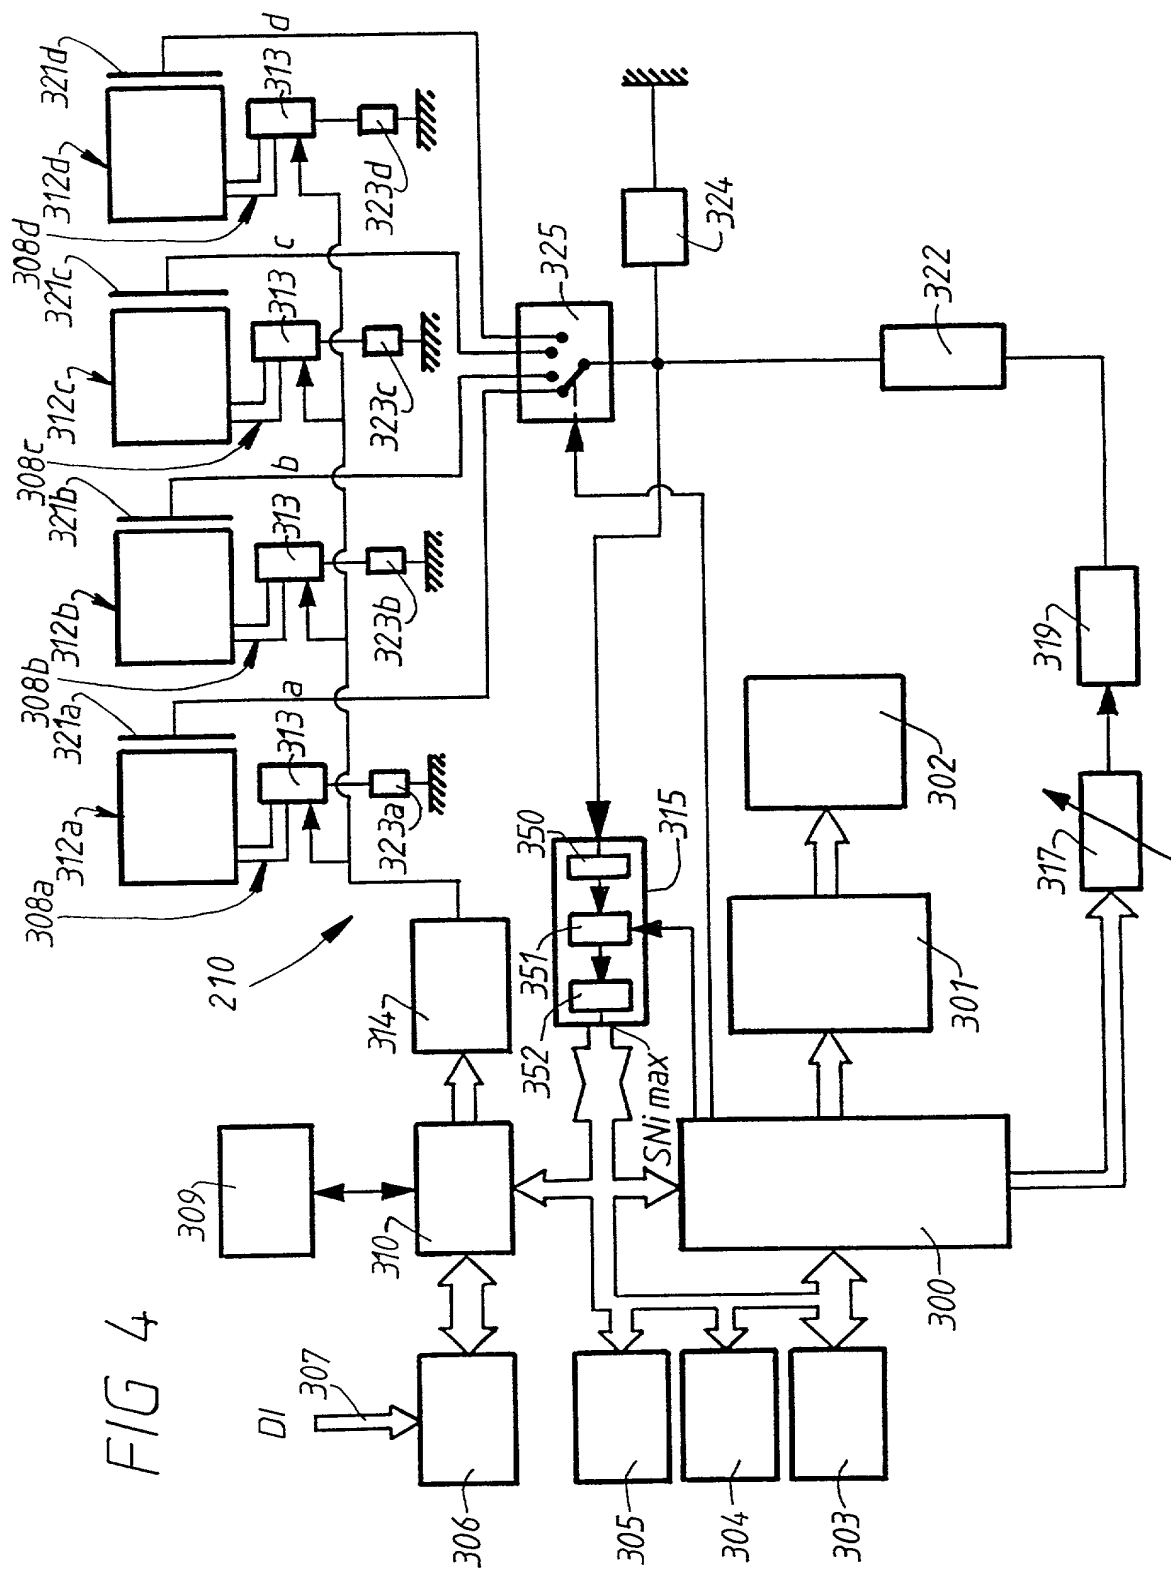


FIG 3



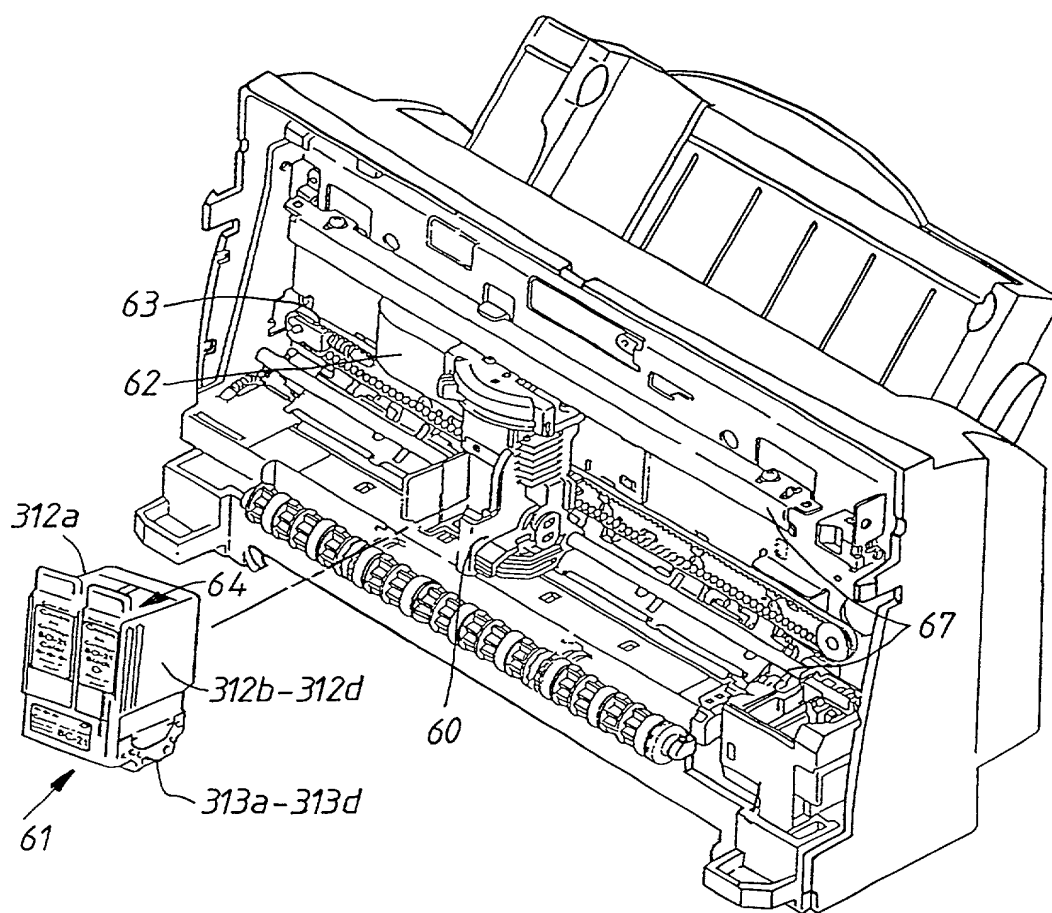


FIG 5


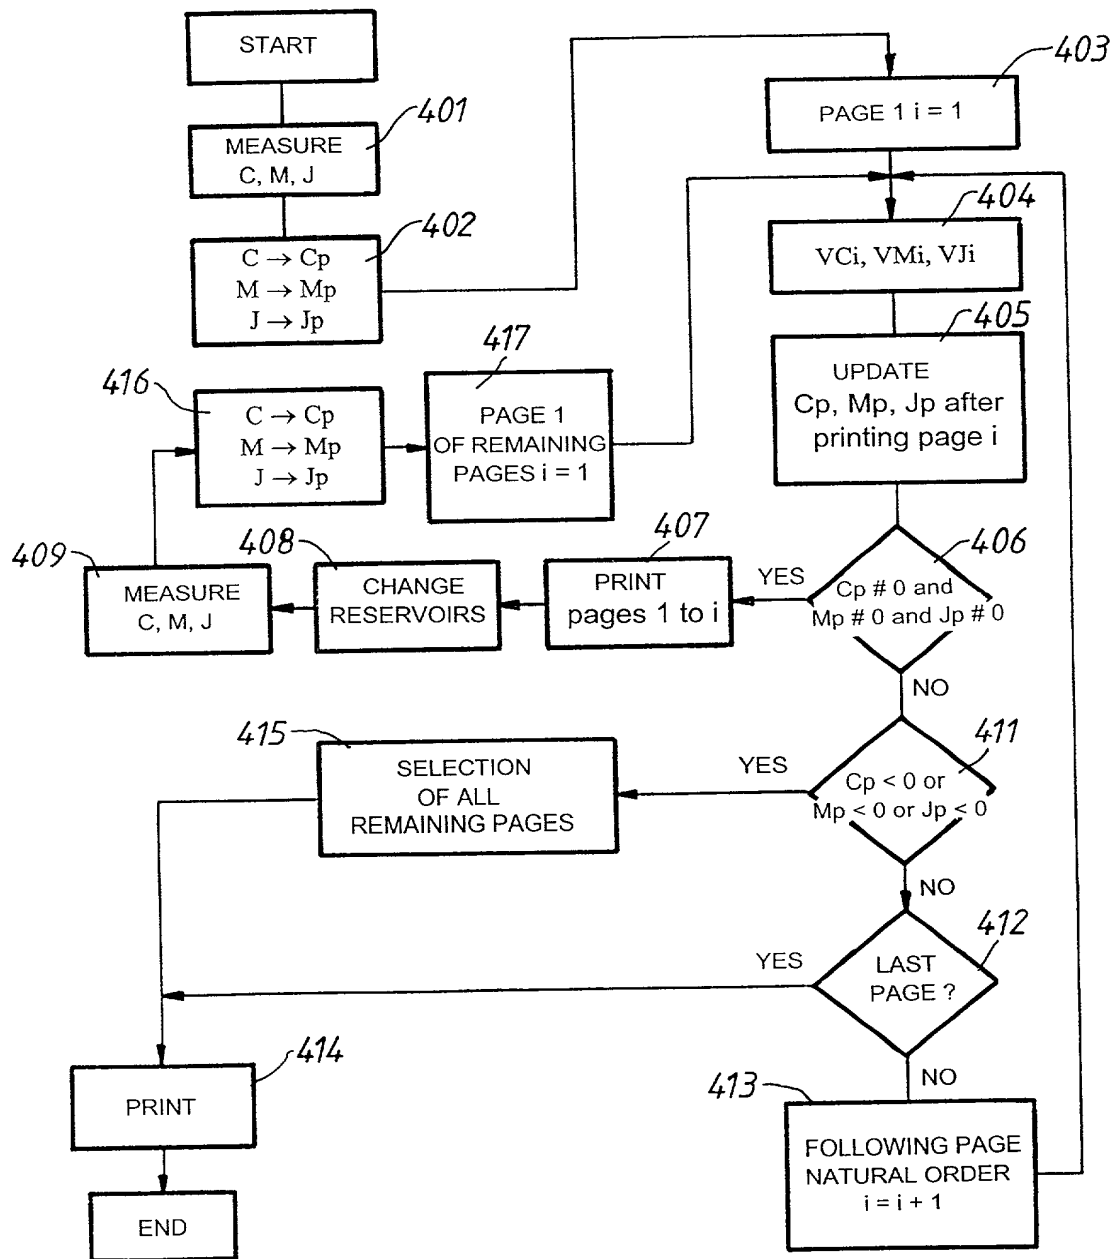


FIG 6

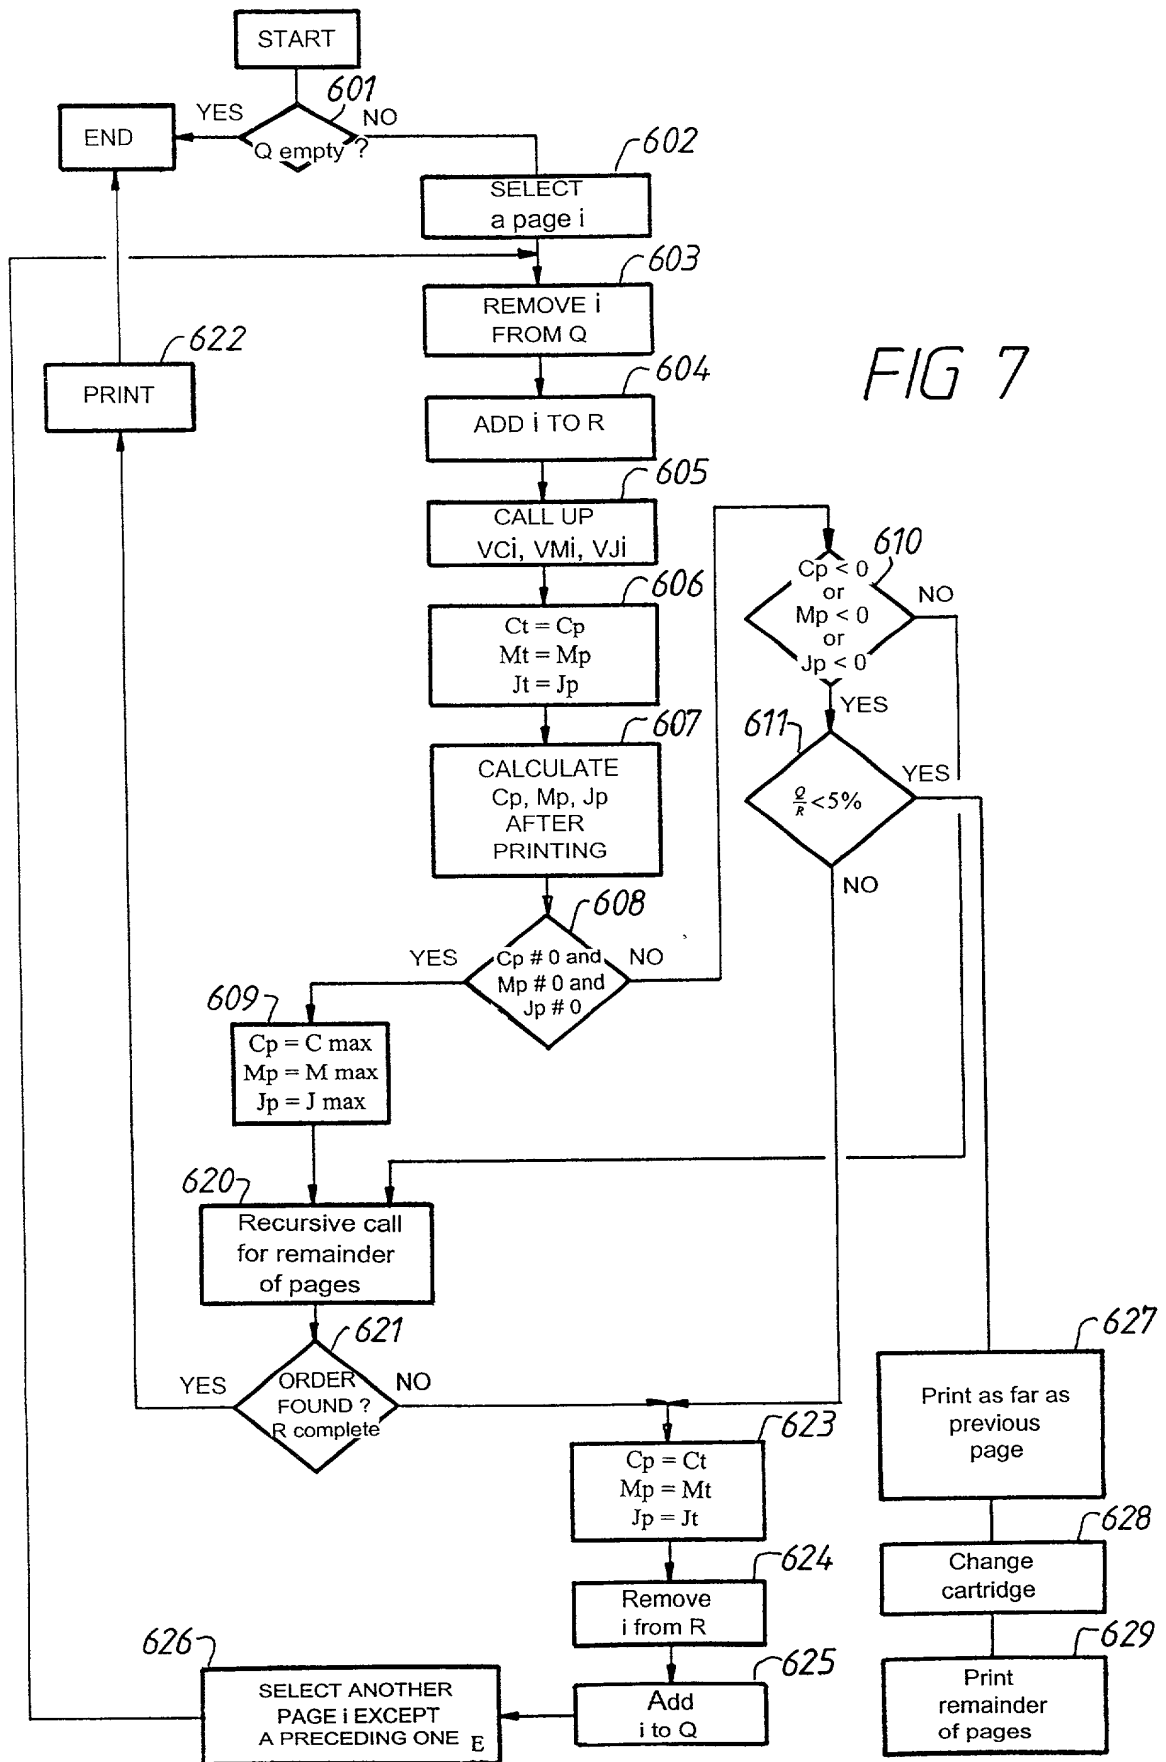

COMBINED DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION

(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled METHOD AND DEVICE FOR PREDICTING THE QUANTITY OF PRINTING PRODUCT AVAILABLE IN A PRINTER AND NECESSARY FOR PRINTING A DOCUMENT

the specification of which ☒ is attached hereto ☐ was filed on \_\_\_\_\_ as United States Application No. or PCT International Application No. \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed (Day/Mo./Yr.)	(Yes/No) Priority Claimed
France	9813315	October 23, 1998	Yes
France	9813316	October 23, 1998	Yes

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Application No.	Filed (Day/Mo./Yr.)	Status (Patented, Pending, Abandoned)
-----------------	---------------------	---------------------------------------

N/A

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

**FITZPATRICK, CELLA, HARPER & SCINTO**  
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor JEAN-JACQUES MOREAU

Inventor's signature \_\_\_\_\_

Date \_\_\_\_\_ Citizen/Subject of FRANCE

Residence 91b, rue de Dinan, 35000 Rennes, France

Post Office Address c/o Canon Kabushiki Kaisha

30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

COMBINED DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION

(Page 2)

Full Name of Second Inventor Mickaël LORGEUX

Inventor's signature \_\_\_\_\_

Date \_\_\_\_\_

Citizen/Subject of FRANCE

Residence 8, Square de la Grande Charbonnière, 35700 Rennes, France

Post Office Address c/o Canon Kabushiki Kaisha

30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan